


Matrix - HYDRAULIC LIFTS





Specifications

Capacity	630kg / 8 Persons			750kg / 10 Persons		
Levels	2	3	4	2	3	4
Speed	0.40	0.40	0.40	0.40	0.40	0.40
Entrances Options	SE, DE & RA	SE, DE & RA	SE, DE & RA	SE, DE & RA	SE, DE & RA	SE, DE & RA
Car Size	1100x1400x2250	1100x1400x2250	1100x1400x2250	1350x1400x2250	1350x1400x2250	1350x1400x2250
Door Size	900x2000	900x2000	900x2000	900x2000	900x2000	900x2000
Door Options	2CO & 2SO	2CO & 2SO	2CO & 2SO	2CO & 2SO	2CO & 2SO	2CO & 2SO
Shaft size - SE	2000x1800	2000x1800	2000x1800	2200x1800	2200x1800	2200x1800
Shaft size - DE	2000x1870	2000x1870	2000x1870	2200x1870	2200x1870	2200x1870
Shaft size - RA	1800x1900	1800x1900	1800x1900	2100x1900	2100x1900	2100x1900
Pit Depth	1200	1200	1200	1400	1400	1400
Headroom	3500	3500	3500	3500	3500	3500
Travel	4m	8m	12m	4m	8m	12m
Pump Unit & Ram	GMV	GMV	GMV	GMV	GMV	GMV

630kg SE 2CO

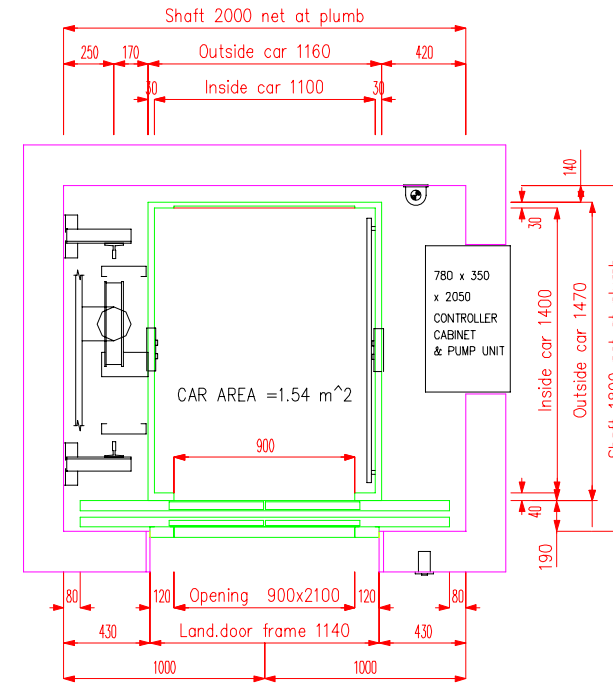

630kg RA 2SO

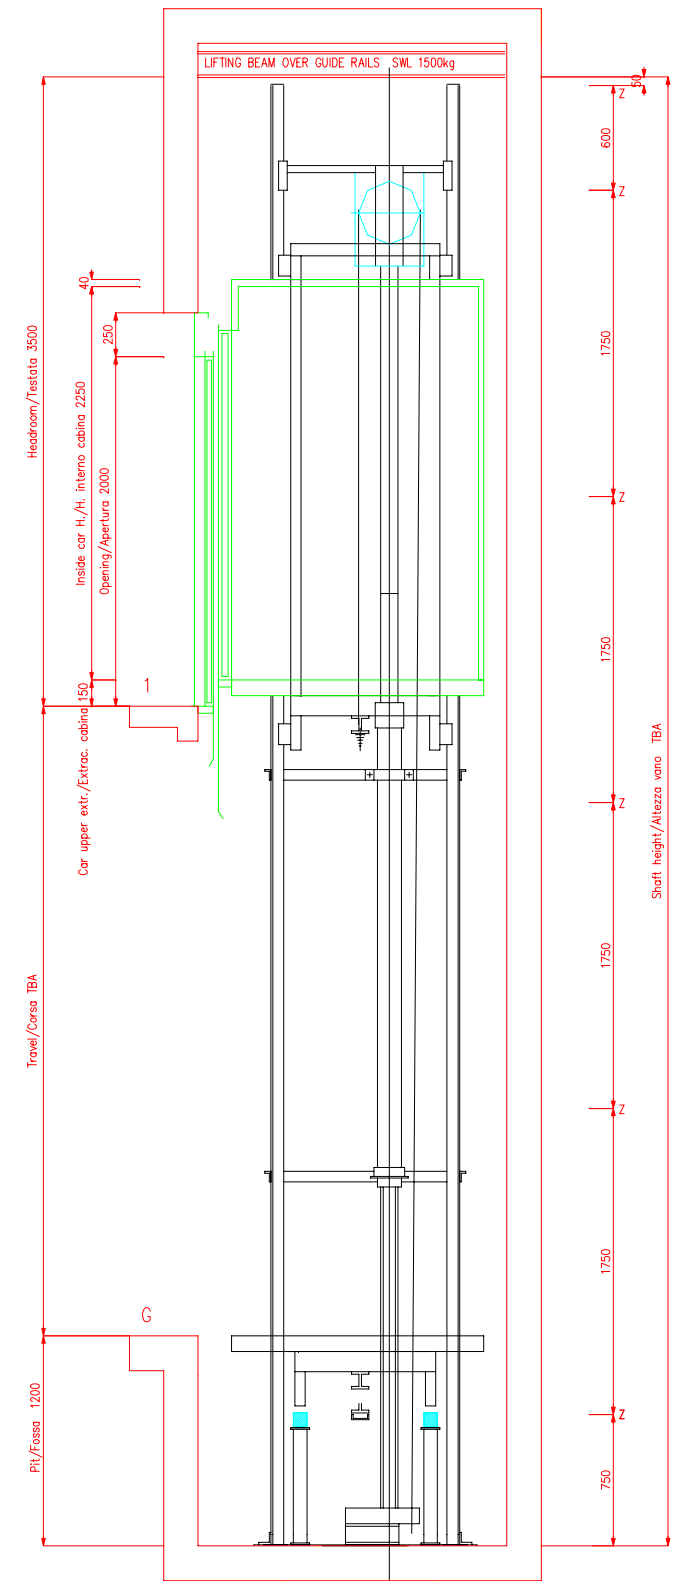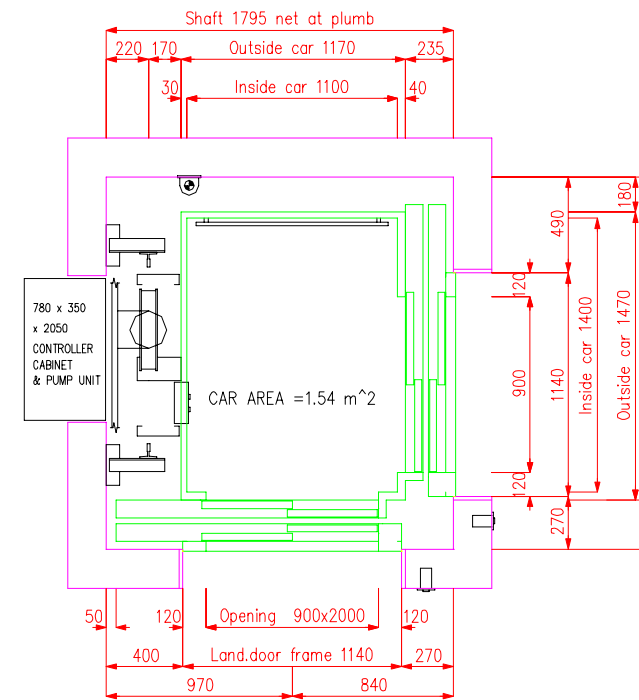

Inclusions & Options

s - standard o - option

Car

Removable wall finishes	s
- choice from Abet Laminate standard laminate range	
Door jambs	inox 304
Lighting - 4LV + Fluro	s
Vinyl floor covering	s
- choice from standard range	
Rubber floor covering	o
Handrail - AS1735.12	o
Mirror	o
Car natural ventilation	s
Trap Door - 350x500	o
Car & Landing doors	inox 304
Car door protection	o
Car door locking	
Car operating panel	column
- see legend for COP standard inclusions	
Second COP	o
Voice announcer	o

Landing panels

	inox 304
- including, AS1735.12 push buttons, fire warning, bip sound	
Provision for fireman key	o
Provision for security key	o

Control type

Serial CAN-BUS	s
2 button collective	s
Star / delta starting	s
AS1735 fireman control	o
MRL cabinet	o
Duplex control	o

Safety

Car top handrail	s
Car top kickplate	s
Sheave guarding	s




LEGEND

inox 304 - stainless steel
 4LV - 4 x switched low voltage down lights
 Fluro - 1 x 30W maintained emergency light
 Handrail - 40mm stainless steel
 Car natural ventilation - 1.75% + 1.75%
 Car door protection - Memco or TL Jones
 Car operating panel (COP) - inox 304


SE - single entrance
 DE - dual entrance
 RA - right angle entrance
 CO - centre opening
 SO - side opening

- including, AS1735.12 push buttons with beep, 40mm dot matrix indicator, 2 switches, telephone / alarm button, provision for 'Designcom telephone, load notice insert, telephone / alarm instructions.


630kg DE 2CO

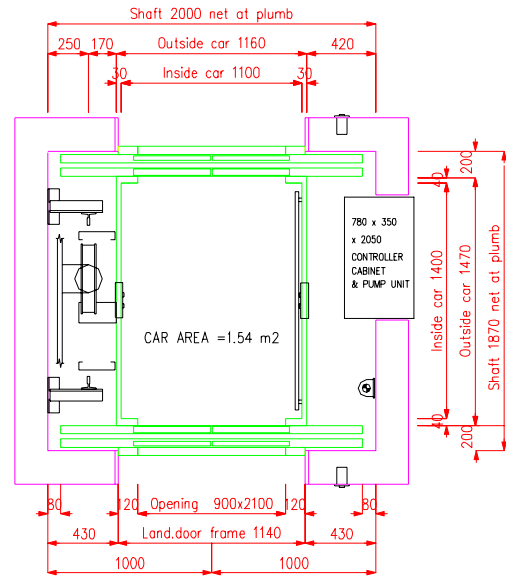

750kg SE 2CO

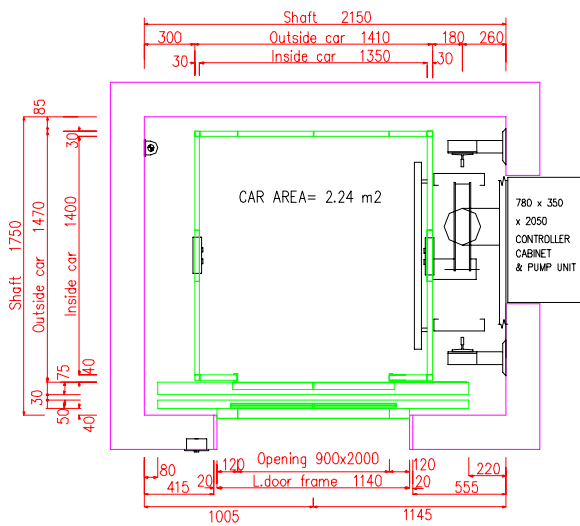

750kg RA 2CO

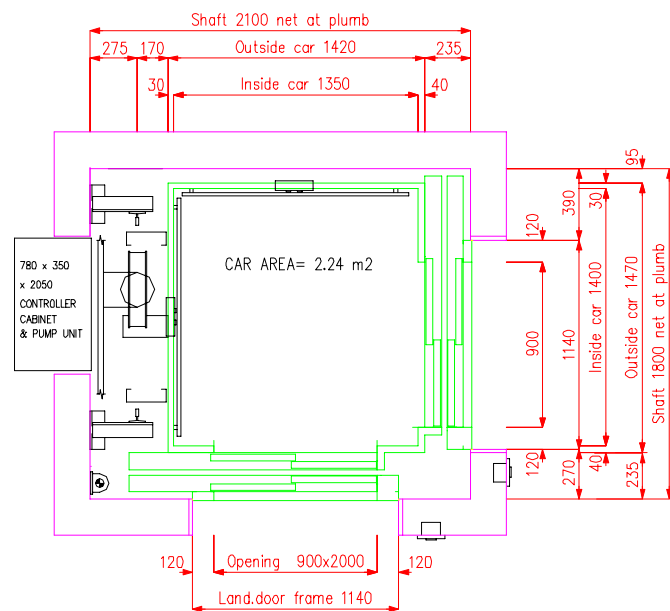

Matrix - HYDRAULIC LIFTS

MRL or Conventional hydraulic passenger lifts

630kg & 750kg available as MRL
630kg to 20t available upon enquiry



12 Rich Street
Marrickville NSW 2204
Ph. 02 9572 3888
Fax. 02 9572 3899
Email glenn.armstrong@sanscord.com.au

